




- LEGEND**
- Rack row (tenant supplied)
 - ▨ Contained cold aisle
 - == -- Overhead busway (A / B)
 - ... Cable tray route
 - Sprinkler head (support zone only)
 - C CRAH unit

- NOTES**
1. Typical for Data Halls 1-4. Cold-side containment, overhead supply and busway — no raised floor (ER §4.1, BOD §3.2).
 2. Design rack density 8 kW average / 15 kW peak per rack (ER §3.1). ~312 racks at the hall's 2500 kW IT load.
 3. Dual overhead busway runs (A + B) give dual-corded racks an independent path to each PDU — refer PDC-DWG-012.
 4. Cable containment: separate data and power tray routes, physically segregated per the containment framework.
 5. White-space suppression is inert gas or water mist, subject to fire-engineering approval by the authority — refer PDC-DWG-015; sprinklers apply to support areas only.
 6. 7 CRAH units per hall (N+1: 6 duty + 1 standby), overhead supply within the 2.4 m service zone.


AGENT-BASED SUPPRESSION (INERT GAS / WATER MIST) — SUBJECT TO AHJ APPROVAL — REFER PDC-DWG-015

COLD-AISLE CONTAINED WHITE SPACE — 1,250 m²

ELECTRICAL / MECHANICAL SUPPORT

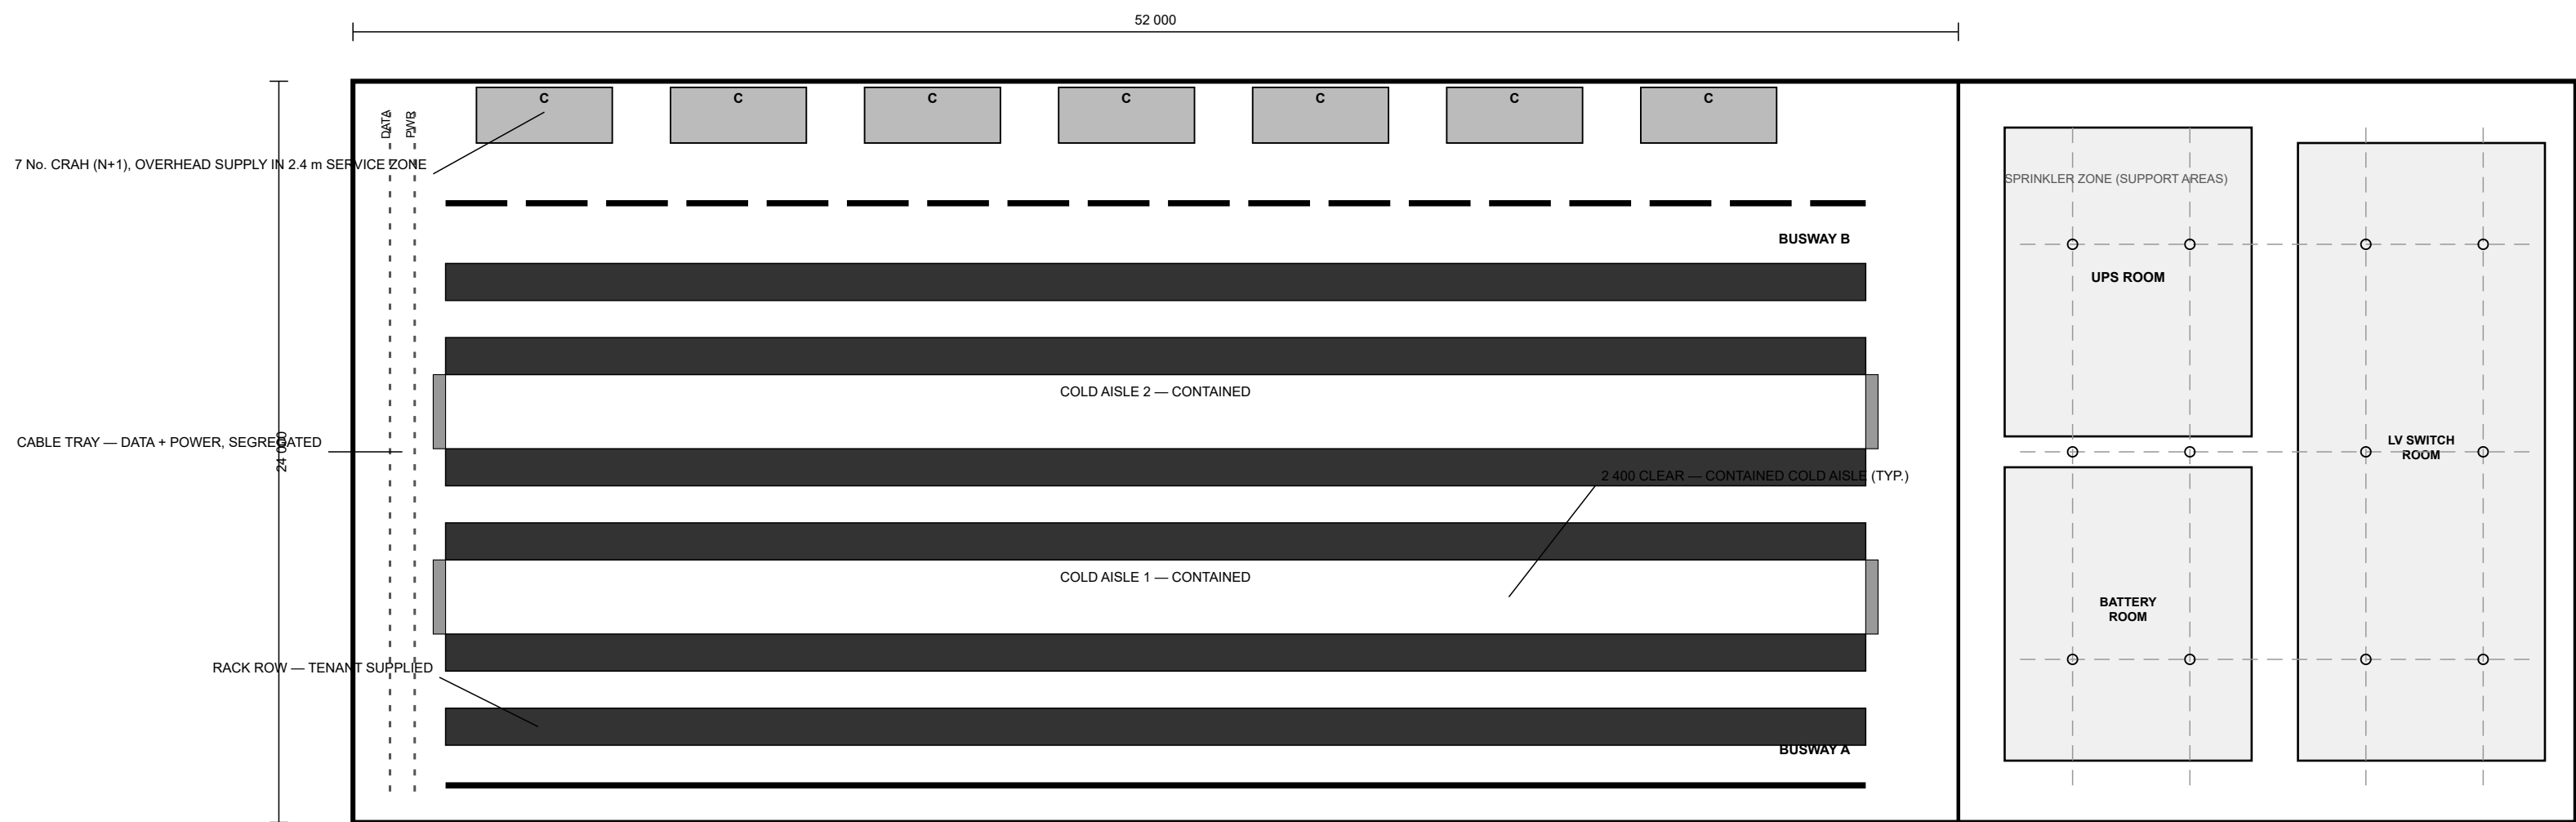

RACK / AISLE SCHEDULE				
AISLE	RACKS	AVG KW	PEAK KW	CONTAINMENT
COLD AISLE 1	156	8	15	COLD-AISLE, PANEL + DOOR
COLD AISLE 2	156	8	15	COLD-AISLE, PANEL + DOOR
HALL TOTAL	312	8	15	N/A



PROJECT
POLARIS DC-1 — AVIAPOLIS DATA CAMPUS, PHASE...

EMPLOYER
POLARIS DIGITAL INFRASTRUCTURE OY

CONTRACTOR
NORDBUILD OY

DRAWING
TYPICAL HALL — CONTAINMENT & OVERHEAD SERVI...

DISCIPLINE
MECHANICAL/ELECTRICAL

DWG No	REV	DATE	SCALE
PDC-DWG-014	A	24.02.2026	1:200
SYNTHETIC DEMONSTRATION DATA — NOT A REAL PROJECT			